





















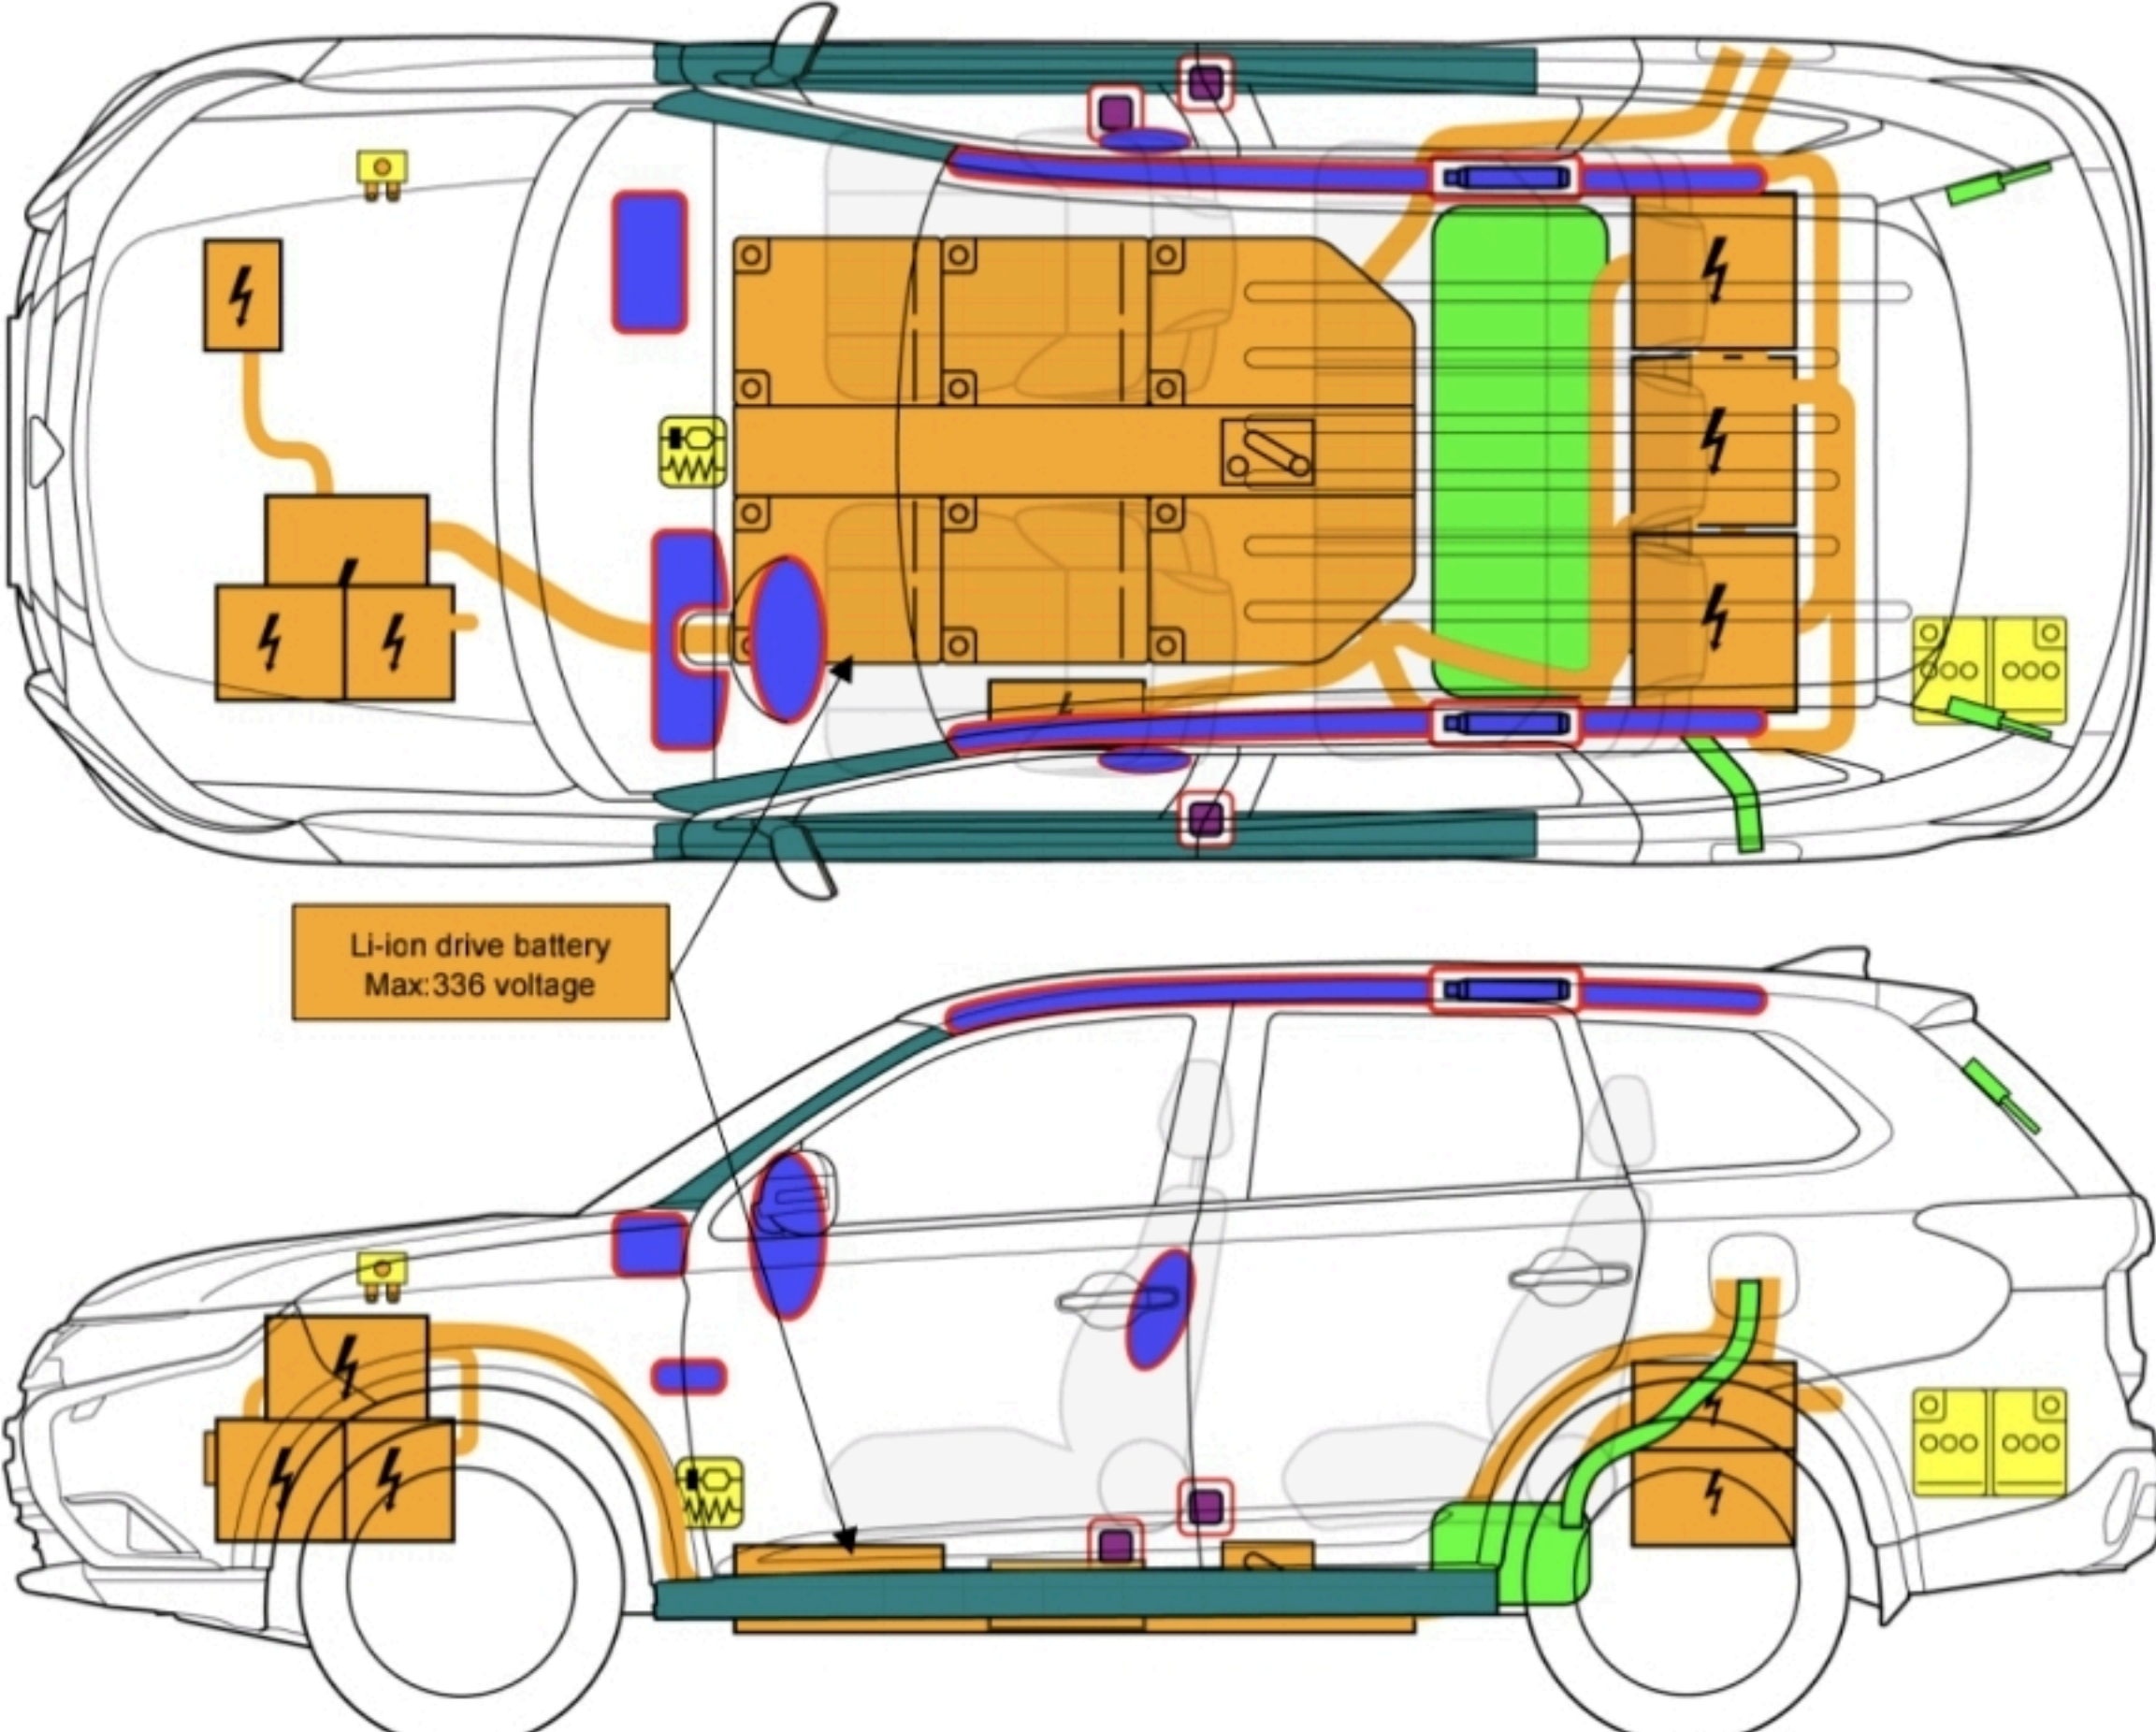





Mitsubishi Outlander Plug-in Hybrid



 MITSUBISHI MOTORS		OUTLANDER PHEV Body type: Station wagon Type: GG2W, GG3W Model year: 2016 – 2020							
									
 <div>Li-ion drive battery Max:336 voltage</div>									
	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut / Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable / component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage
ID No. GGW-ENRS-EN02					Version No. 02		Version Date. 8/2020		Page 1/4



Mitsubishi Outlander Plug-in Hybrid



	OUTLANDER PHEV Body type: Station wagon Type: GG2W, GG3W Model year: 2016 – 2020		
1. Identification / recognition			

Features on vehicle exterior



2. Immobilisation / stabilization / lifting

How to determine if vehicle is ON / OFF



Support positions for Jack and Lift



3. Disable direct hazards / safety regulations


1. How to disconnect the 12V auxiliary battery negative terminal

Wait 1 minutes
after turning off the
POWER SWITCH.

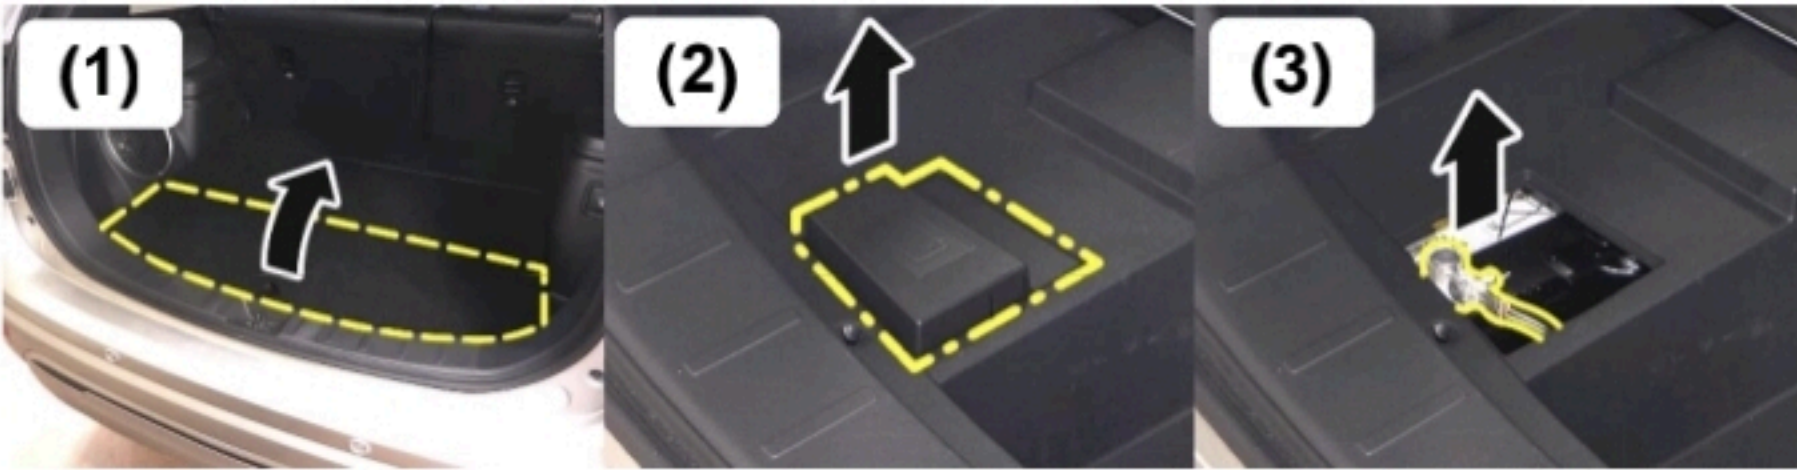

2. How to disconnect the “Power unit control” fuse

If you cannot locate this fuse, remove all fuses and relays in the fuse box.

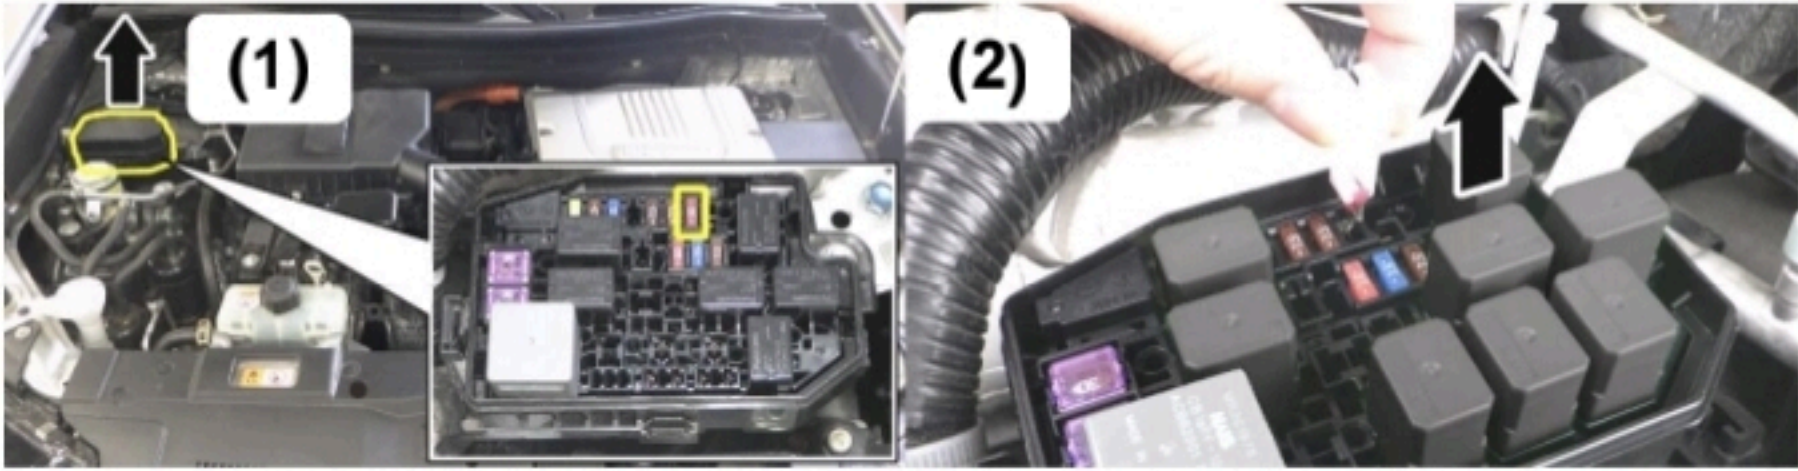


3. Use insulating Personal Protective Equipment (PPE)
(Rubber insulating gloves, Rubber soled insulating)



4. How to shut down High voltage (pull out the service plug)


Next page

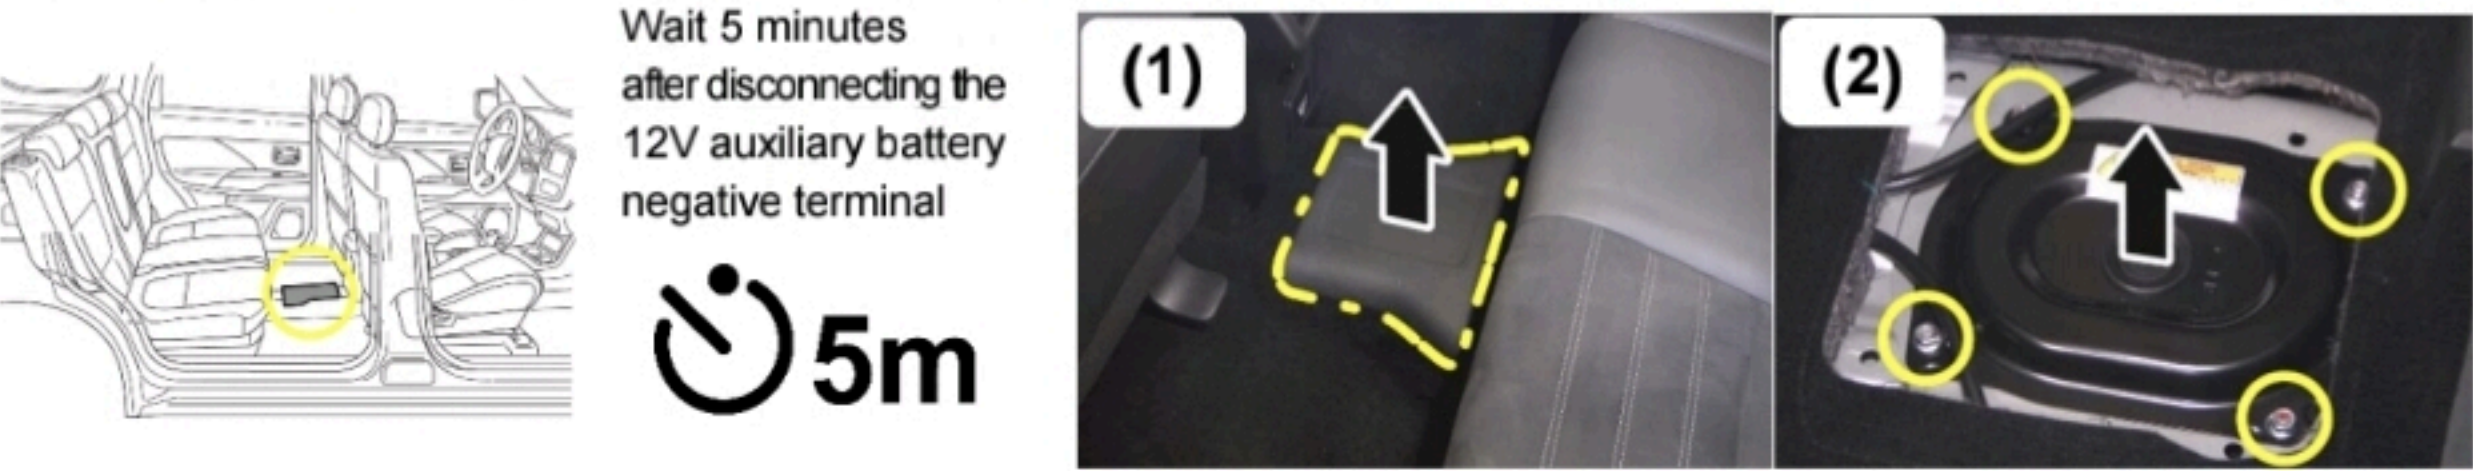

	ID No. GGW-ENRS-EN02	Version No. 02	Version Date. 8/2020	Page 2/4
--	-------------------------	-------------------	-------------------------	-------------

© MITSUBISHI MOTORS CORPORATION. All rights reserved.

	OUTLANDER PHEV Body type: Station wagon Type: GG2W, GG3W Model year: 2016 – 2020		
--	---	--	--

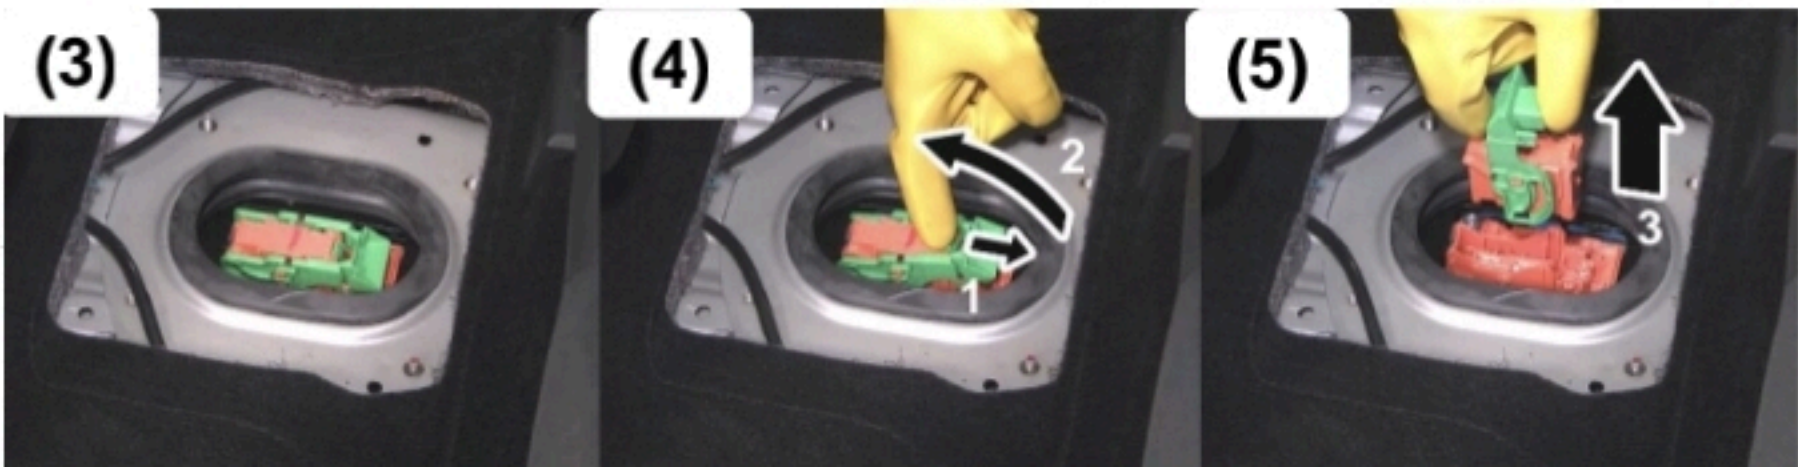



Mitsubishi Outlander Plug-in Hybrid



4. Access to the occupants

Vehicle CUT Zones

	CUT ZONE
	Risk of high voltage shock and airbag deployment

Front of vehicle

High-tensile and Ultra-high-tensile steel panels location

	High-tensile and Ultra-high-tensile steel panels
--	---

5. Stored energy / liquids / gases / solids

Fluids / gases used in this vehicle

	Unit name	Capacity & Type	Designation	Colour
	Fuel tank	45 liters	Petrol	Light orange
	Li-ion drive battery	12 kWh (2016-2017MY) 13.8 kWh (2018-2020MY)	Electrolyte	Clear & colourless
	12V auxiliary battery	36 Ah	Electrolyte	Clear & colourless



6. In case of fire

1. Vehicle fire

In case of vehicle fire, alert fire department immediately and start extinguishing the fire.

2. Fire-extinguishing

- WARNING;**
 - Never use seawater or any water containing salt.
 - Use ABC powder or large quantity of water to extinguish the fire.



	ID No.	Version No.	Version Date.	Page
	GGW-ENRS-EN02	02	8/2020	3/4

© MITSUBISHI MOTORS CORPORATION. All rights reserved.

OUTLANDER PHEV
Body type: Station wagon
Type: GG2W, GG3W Model year: 2016 – 2020

7. In case of submersion

Submerged Vehicle

- If the vehicle is submerged or partially submerged, first pull the occupants out of the vehicle and water.
- Then shut down the high voltage system. (Refer to 3.-2. How to disconnect the “Power unit control” fuse and 3.-4. How to shut down High voltage (pull out the service plug))
- If the vehicle is submerged, the drive battery may generate flammable hydrogen gas.
- If the vehicle is submerged, water may enter the drive battery.





8. Towing / transportation / storage

How to Transport



9. Important additional information



1. Supplemental Restraint System (SRS)
2. High-voltage component location

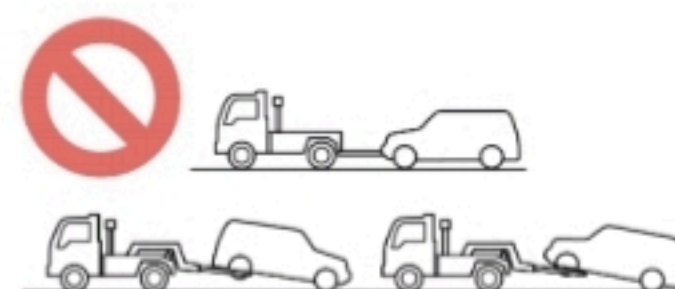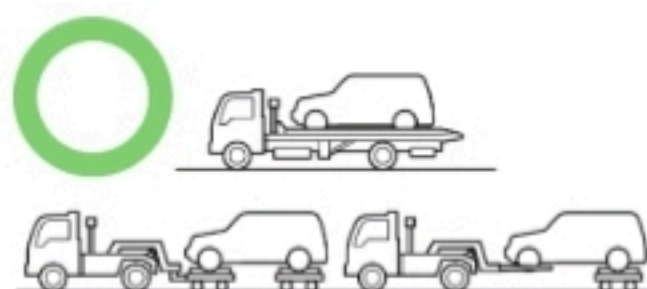

9. Important additional information

1. Supplemental Restraint System (SRS)

2. High-voltage component location

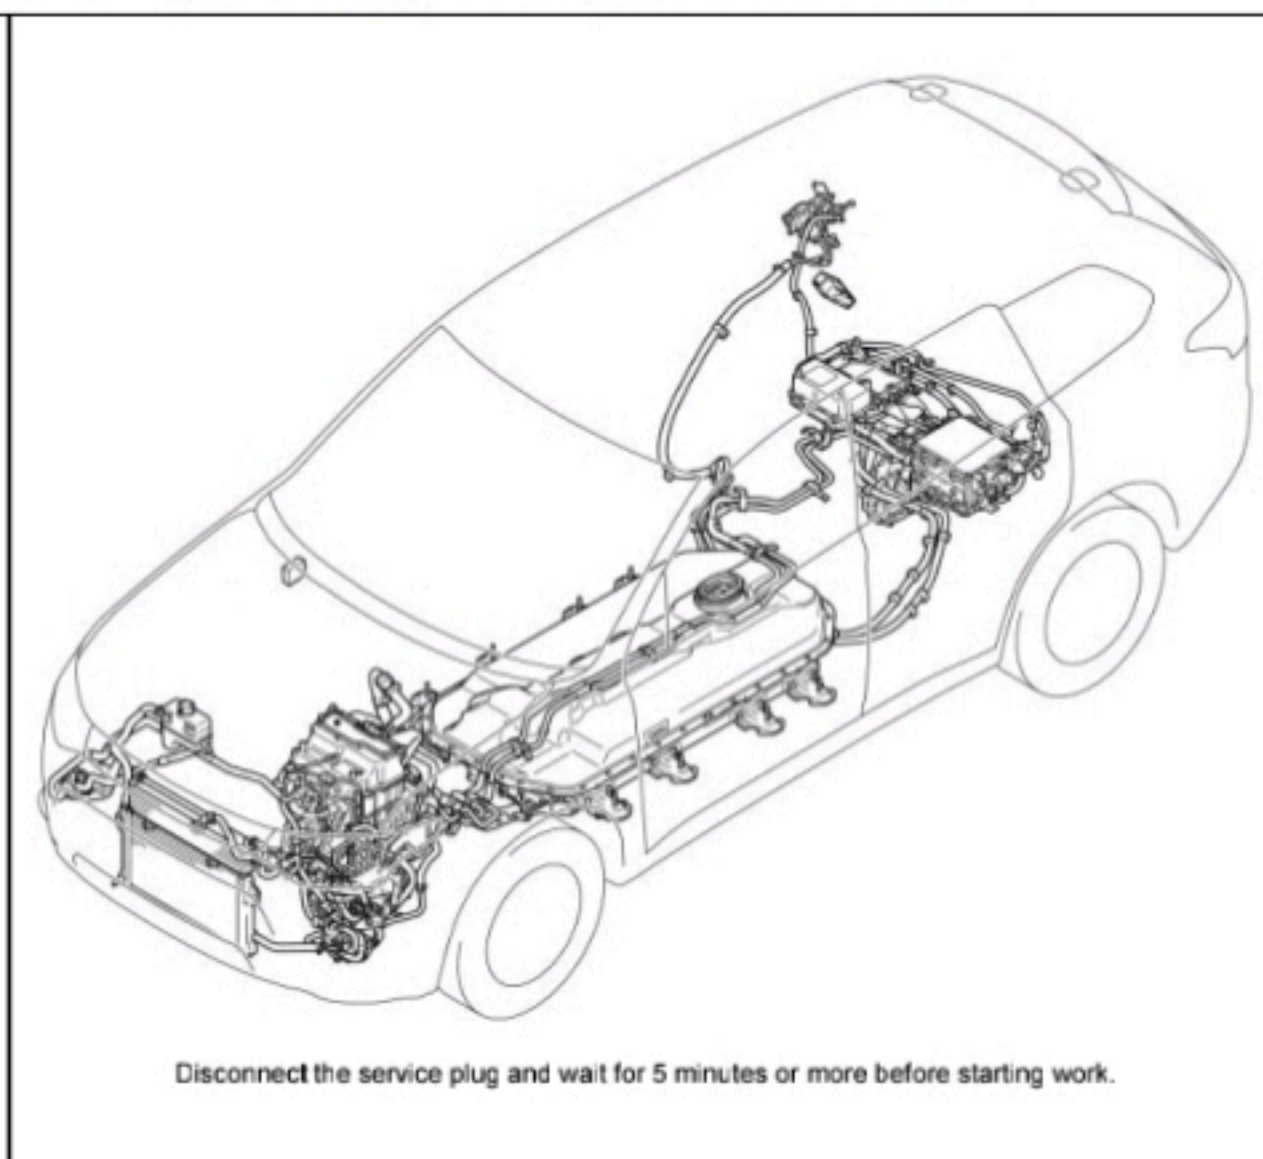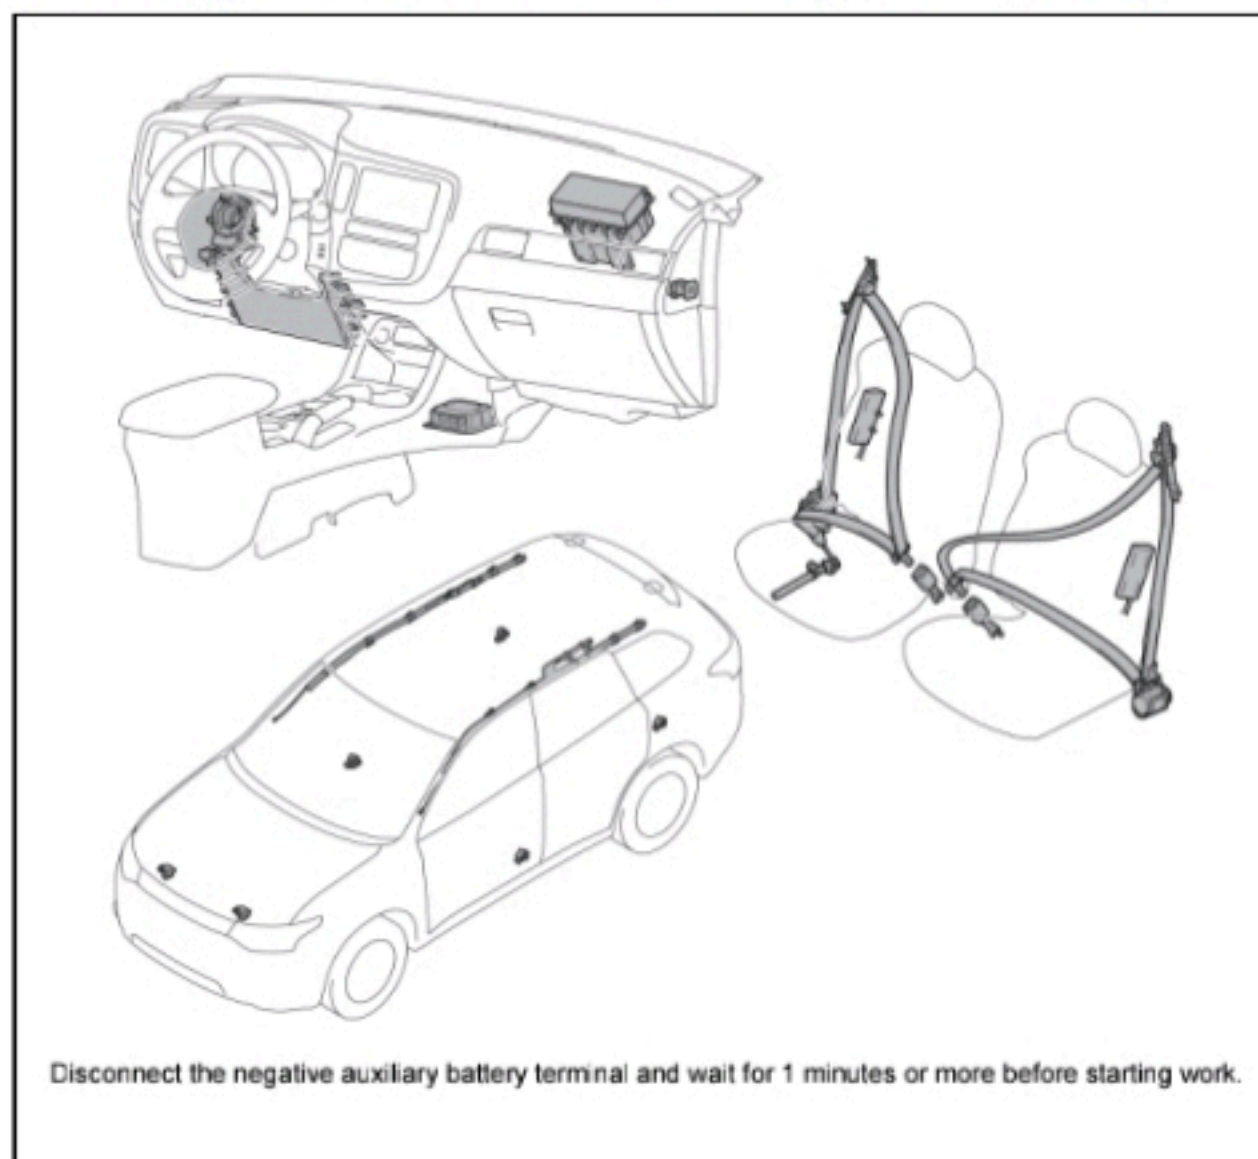

3. Discharge measures for drive battery

For the detail, please refer to Emergency Response Guide.

10. Explanation of pictograms used

	Bonnet		Flammable		Explosive		General warning sign
	Boot		Hazardous to the human health		Corrosives		Warning, Electricity
	Lifting point; central support		Use ABC powder to extinguish the fire		Use water to extinguish the fire		

	ID No.	Version No.	Version Date.	Page
	GGW-ENRS-EN01	02	8/2020	4/4